




Order and Quote Form

Made-to-Length Custom Tile Insert + Channel


Drain Profiles

Minimum Tile Insert Depth*
 1.5mm Thickness: 10mm
 3mm Thickness: 13mm

'U' Shape Profile
 Depth: 23mm Minimum / 52mm Maximum

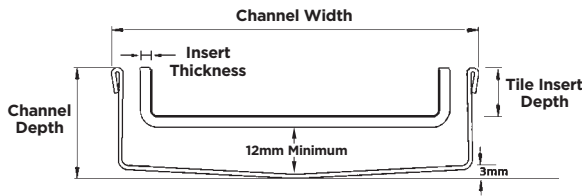

Rebate Profile
 Depth: 42mm Minimum

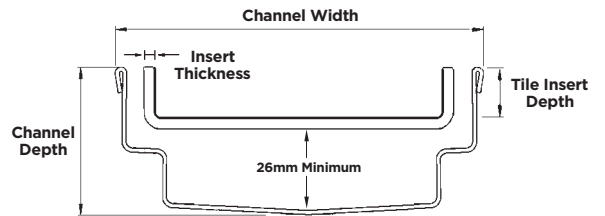

Specify Profile and Channel Type, Dimensions, Outlet Positions/Size and Steel Grade

DRAIN 1

Drain Profile


- 'U' Shape Profile
- Rebate Profile

Insert Thickness

- 1.5mm (max 125mm wide)
- 3mm (max 300mm wide)

Channel Type

- 'Vee' Channel
- Cross Break*

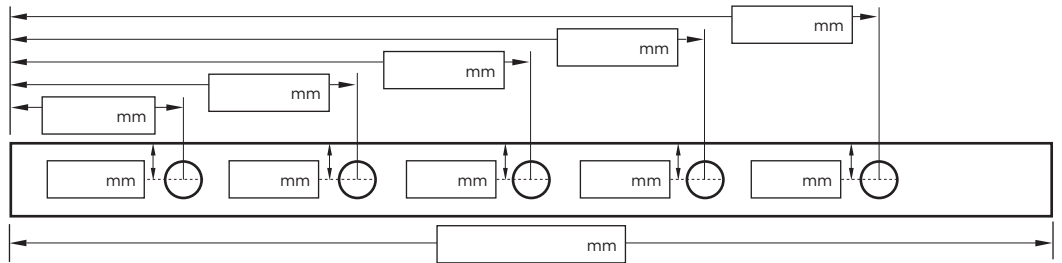

Outlet Size

- 38mm 44mm 51mm
- 63mm 76mm 89mm

Channel Width

Channel Depth

Tile Insert Depth*

Steel Grade Required

- 316 Grade 304 Grade

*Only available for 'U' Shape Profile up to 3000mm length with 1 outlet.

DRAIN 2

Drain Profile


- 'U' Shape Profile
- Rebate Profile

Insert Thickness

- 1.5mm (max 125mm wide)
- 3mm (max 300mm wide)

Channel Type

- 'Vee' Channel
- Cross Break*

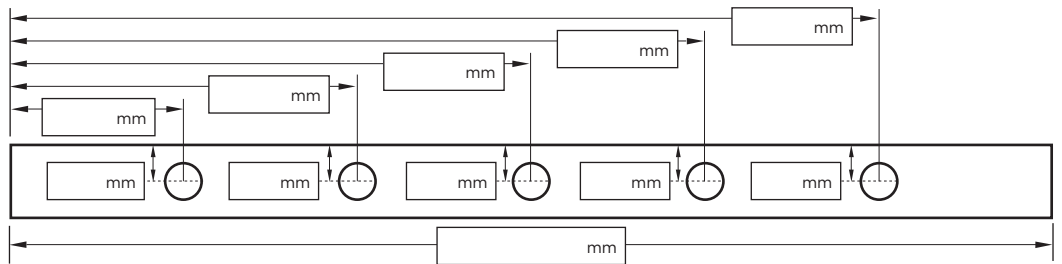

Outlet Size

- 38mm 44mm 51mm
- 63mm 76mm 89mm

Channel Width

Channel Depth

Tile Insert Depth*

Steel Grade Required

- 316 Grade 304 Grade

*Only available for 'U' Shape Profile up to 3000mm length with 1 outlet.

NOTE: See AS3500 standard & local regulator for specific outlet/drain requirements. Outlet Size must be smaller than selected Range. Stainless Steel Grade is 316 unless specified. Made-to-Length (MTL) minimum charge of 800mm. Tile Inserts longer than 1200mm supplied in multiple sections. Channels over 3000mm are supplied in multiple sections with joiner. Orders received after 11am are processed next working day, +/- 2mm tolerance on dimensions.

Full Name

Email Address

Company Name

Order Number

Stormtech Quote Number

Telephone

Signature